

Bourdon Tube Pressure Gauges

Bayonet ring case stainless steel

RCh
RChG

Standard Versions

Information on general and metrological features (e.g. load limits/temperature resistance) and standard pressure ranges/scale divisions can be found in model overview 1000.

Accuracy (DIN EN 837-1)

Class 1.0

Case

With bayonet ring, stainless steel 304 (1.4301)

Degree of Protection (DIN EN 60 529/IEC 529)

IP54

IP65 for model RChG 100 and
model RChG 160 (measuring spans ≥ 2.5 bar onwards)

Blow-out Device

Model RCh	blow-out plug at the back of the case, $\varnothing 1"$
Model RChG 100	blow-out plug at the back of the case, $\varnothing 40$ mm (1 1/2")
Model RChG 160	blow-out device at the top of the case coverage

Case Ventilation

Model RChG 100	without ventilation, but with internal pressure compensation via pressure equalizing membrane
Model RChG 160	via blow-out device

Case Filling

For model RChG: glycerin

Nominal Case Size

Model RCh:	100, 160, 250 mm (4, 6, 10")
Model RChG:	100, 160 mm (4, 6")

Wetted Parts

Type – 3:	connection:	stainless steel 316L (1.4404)
	Bourdon tube:	stainless steel 316L (1.4404) gas-shielded arc welding
		≤ 40 bar (600 psi) c-form
		≥ 60 bar (800 psi) helical form
		1600 bar (20,000 psi) NiFe-alloy helical form

Type – 1:	connection:	brass
	Bourdon tube:	≤ 40 bar (600 psi) bronze, c-form soft-soldered
		≥ 60 bar (800 psi) stainless steel 316L (1.4404) helical form silver brazed

Case Configuration

Connection:	screwed
Position of the connection:	- bottom connection - lower back connection (r)
Mounting device:	- without - back flange for surface mounting (Rh) - front flange for panel mounting (Fr)

Pressure Ranges (DIN EN 837-1)

0 – 0.6 bar to 0 – 1600 bar (0 – 10 psi to 0 – 20,000 psi)	for type – 3
0 – 0.6 bar to 0 – 1000 bar (0 – 10 psi to 0 – 15,000 psi)	for type – 1

Process Connection

G 1/2 B (1/2" BSP)

Window

Laminated safety glass	for type – 3
Instrument glass	for type – 1

Movement

Stainless steel	for type – 3
Brass/German silver	for type – 1

Dial

Aluminum white, scale black

Pointer

Aluminum black

Safety Category According to DIN EN 837-1

S1 pressure gauges with blow-out device NCS 100 (4")



Ordering Information, Standard Pressure Ranges, Options

See pages 3 and 4

Special Versions and Further Options

- Other process connections upon request, e.g. high pressure connection with male thread (from 0 – 60 bar onwards)
- Other pressure ranges and/or special scales, e.g. dual scale bar/psi, coloured fields or ranges, dial inscriptions, negative scale
- Version as refrigeration gauge with temperature scale (NCS 100)
- Stationary pointer or drag indicator with window made of polycarbonate or laminated safety glass upon request (not for NCS 250)
- Case parts 316L (1.4404) upon request
- Increased degree of protection, e.g. IP65 without case filling, upon request
- Other case fillings upon request
- Models RChG 100 – 3v and 160 – 3v for ambient temperatures to -40 °C (-40 °F)
For ambient temperatures below -20 °C (-4 °F) we recommend: pressure gauges with crimped-on ring case models RChg or RChgG
- Versions for medium temperatures up to $+300$ °C ($+572$ °F) but without case filling upon request (not for NCS 250)
- Position of connection radial at 3 o'clock, 9 o'clock, 12 o'clock (others upon request) or other than vertical installation (90°):
 - for models without case filling and filled models with pressure equalizing membrane
 - for filled models without pressure equalizing membrane upon request
- GOST version for Russia, Ukraine, Kazakhstan, Belarus
- Sour gas resistant version according to NACE

Accessories

Chemical seals:	see catalogue heading 7
Electrical:	see catalogue heading 9.1
Other accessory:	see catalogue heading 11



Case Configurations, Code Letters, Dimensional Data and Weights, Blow-out Device

Bottom Connection



Lower Back Connection

without mounting device

(without code letters)

code letter: r


PVN ENGINEERING CO.,LTD. | Call :

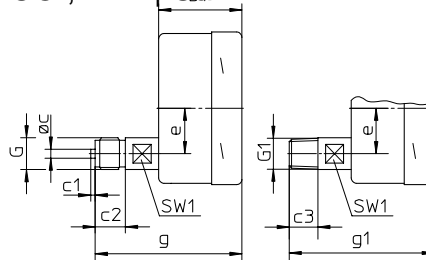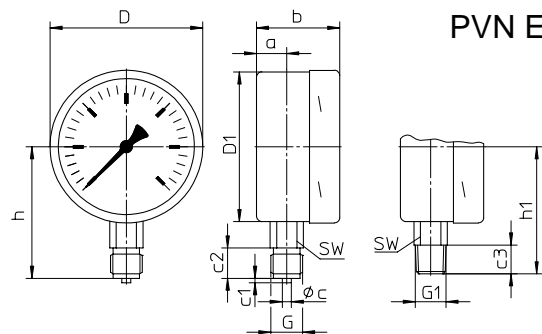

with back flange for surface mounting


code letters: Rh

code letters: rRh

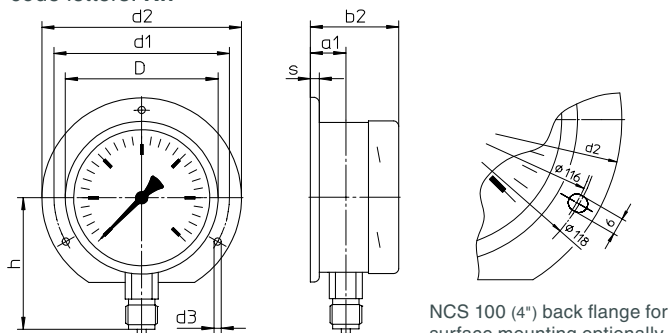

for NCS 250 (10") with 3 brackets

NCS 100 (4") back flange for surface mounting optionally available with slotted holes according to DIN EN 837-1




(available upon request, however not recommended according to DIN EN 837-1)

for NCS 250 (10") with 3 brackets

with front flange for panel mounting


code letters: Fr

code letters: rFr

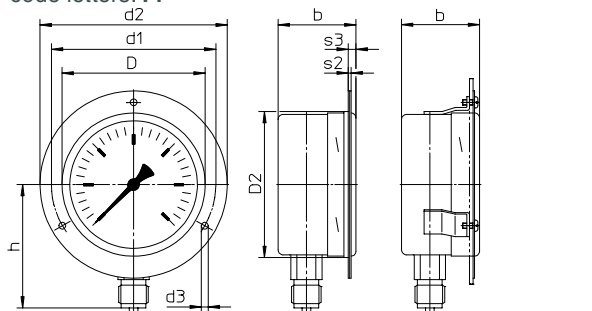

(available upon request, however not recommended according to DIN EN 837-1)

model RChG: welded brackets and removable front flange

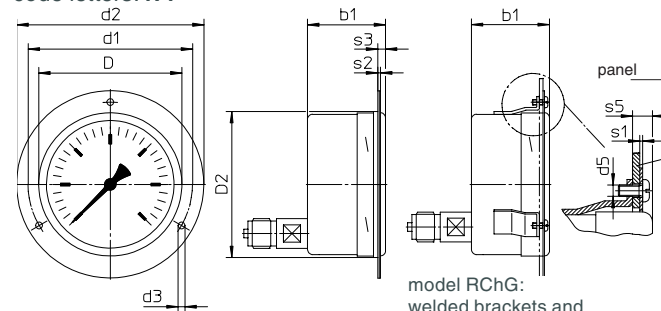

recommended panel cut out for NCS 100 (4") $\varnothing 104 \pm 0.5$ mm (4.09 \pm 0.02")
NCS 160 (6") $\varnothing 164 \pm 0.5$ mm (6.46 \pm 0.02")
NCS 250 (10") $\varnothing 254 \pm 0.5$ mm (10 \pm 0.02")

Dimensional Data (mm/inch) and Weights (kg/lb)

NCS	a	a1	b	b1	b2	b3	c	c1	c2	c3	D	D1	D2	d1	d2	d3	d5	e	G	G1	g	g1	h ^{±1}	h1 ^{±1}
100 4"	20	23.5	55	55	58	58	6	3	20	19	101	99	103	116	132	4.8	M4	30	G 1/2 B M20x1.5	1/2" NPT	97	96	87	84
	0.79	0.93	2.17	2.17	2.28	2.28	0.24	0.12	0.79	0.75	3.98	3.9	4.06	4.57	5.2	0.19		1.18			3.82	3.78	3.43	3.31
160 6"	15	18	50	55	53	58	6	3	20	19	161	159	163	178	196	5.8	M5	30	G 1/2 B M20x1.5	1/2" NPT	92.5	91.5	115	114
	0.59	0.71	1.97	2.17	2.09	2.28	0.24	0.12	0.79	0.75	6.34	6.26	6.42	7.01	7.72	0.23		1.18			3.64	3.6	4.53	4.49
250 10"	15.5	17.5	58	58	60	60	6	3	20	19	251	249	-	270	285	5.8	-	52	G 1/2 B M20x1.5	1/2" NPT	99	98	165	164
	0.61	0.69	2.28	2.28	2.36	2.36	0.24	0.12	0.79	0.75	9.88	9.8		10.63	11.22	0.23		2.05			3.9	3.86	6.5	6.46

Blow-out Device

Blow-out device for model RChG 160
pressure range ≤ 1.6 bar blow-out device no. 5
 ≥ 2.5 bar blow-out device no. 3

Blow-out plug


$\varnothing 1"$

$\varnothing 40$ mm (1 1/2")

for models RCh 100, 160, 250

for model RChG 100

with pressure equalizing membrane



s	s1	s2	s3	s5	SW	SW1	approx. weight ¹⁾	
							RCh	RChG
6	1	2	6	7	22	17	0.60	0.95
0.24	0.04	0.08	0.24	0.28	0.87	0.67	1.32	2.09
6	1.5	2.5	6	8	22	17	1.10	1.95
0.24	0.06	0.1	0.24	0.31	0.87	0.67	2.43	4.3
2	-	2	8.5	-	22	17	2.10	-
0.08	-	0.08	0.33	-	0.87	0.67	4.63	-

¹⁾ data for version without mounting device



Ordering Information

Basic Model:		Bourdon Tube Pressure Gauge with Bayonet Ring Case				RCh
Case filling:	without					without code letters
	glycerin					G
	fillable version					(G)
Nominal case size:	case Ø 100, 160, 250 mm (4, 6, 10")					100, 160, 250
Wetted material:	copper alloy					– 1
	stainless steel					– 3
	Monel, 0 – 0.6 bar to 0 – 1000 bar, movement stainless steel, laminated safety glass, Bourdon tube Monel gas-shielded arc welding, ≤40 bar c-form, ≥60 bar helical form, bottom connection, optionally r					– 6
Case configuration:	case/connection		screwed			without code letters
			welded (only type – 3, not for NCS 250)			v
	position of the connection		bottom connection lower back connection			without code letters r
	mounting device		without back flange for surface mounting front flange for panel mounting			without code letters Rh Fr
Pressure ranges:	–1200	/	0	mbar	30" hg vac. – 0 psi	
	–0.6	/	0	bar		
	–1	/	0	bar		
	–1	/	+0.6	bar	30" hg vac. – 15 psi	
	–1	/	+1.5	bar	30" hg vac. – 30 psi	
	–1	/	+3	bar	30" hg vac. – 60 psi	
	–1	/	+5	bar	30" hg vac. – 100 psi	
	–1	/	+9	bar	30" hg vac. – 160 psi	
	–1	/	+15	bar	30" hg vac. – 200 psi	
					30" hg vac. – 300 psi	
	0	–	0.6	bar	0 – 10 psi	
	0	–	1	bar	0 – 15 psi	
	0	–	1.6	bar		
	0	–	2.5	bar	0 – 30 psi	
	0	–	4	bar	0 – 60 psi	
	0	–	6	bar	0 – 100 psi	e.g. 0 – 6 bar
	0	–	10	bar	0 – 160 psi	
	0	–	16	bar	0 – 200 psi	
					0 – 300 psi	
	0	–	25	bar	0 – 400 psi	
	0	–	40	bar	0 – 600 psi	
	0	–	60	bar	0 – 800 psi	
					0 – 1,000 psi	
	0	–	100	bar	0 – 1,500 psi	
	0	–	160	bar	0 – 2,000 psi	
					0 – 3,000 psi	
	0	–	250	bar	0 – 4,000 psi	
					0 – 5,000 psi	
	0	–	400	bar	0 – 6,000 psi	
	0	–	600	bar	0 – 10,000 psi	
	0	–	1000	bar	0 – 15,000 psi	
	0	–	1600	bar for type – 3	0 – 20,000 psi	
Process connection:	standard thread	G ½ B	– 1 and – 6	max. 0 – 1000 bar	G ½ B	
	options	½" NPT	– 3	max. 0 – 1600 bar	½" NPT	
		M20x1.5			M20x1.5	
		G ¼ B ¹⁾	– 1	max. 0 – 600 bar	G ¼ B	
		¼" NPT ¹⁾	– 3 and – 6	max. 0 – 1000 bar	¼" NPT	
		M12x1.5 ¹⁾			M12x1.5	
		high pressure connection		M16x1.5	HP connection M16x1.5	
	female thread (0 – 60 bar onwards) for ¼" tube, with 60° cone		9/16" – 18 UNF	HP connection 9/16" – 18 UNF		
Options:	see page 4					

Example: RCh 100 – 3 rFr, 0 – 6 bar, G ½ B

¹⁾ not for NCS 250 (10°)



Ordering Information, Further Options

Basic Model: Bourdon Tube Pressure Gauge with Bayonet Ring Case		RCh
Model code:		see page 3
Options:	adjustable pointer with aluminum mechanism	
	red mark on the dial	
	plastic clip red or green, external at the bayonet ring (not for NCS 250)	
	stationary red pointer on the dial	
	adjustable with removable ring	
	stationary red pointer adjusting mechanism brass, nickelplated with window made of acrylic glass, screwed	
	adjustable externally removable key	
	non-removable key	
	adjusting mechanism stainless steel with window made of acrylic glass, screwed	
	adjustable externally removable key	
	non-removable key	
	min./max. drag indicator adjusting mechanism brass, nickelplated with window made of acrylic glass, screwed	
	measuring spans 2.5 bar onwards adjustable externally removable key	
	non-removable key	
	adjusting mechanism stainless steel with window made of acrylic glass, screwed	
	adjustable externally removable key	
	non-removable key	
	receiver gauge 0.2 – 1 bar (3 – 15 psi), linear	
	scale 0 – 100 % square	
	indication accuracy grade 2A (± 0.5 %) according to ASME B 40.1 ¹⁾	
	special adjustment (reference points = odd values, e.g. 100 KN = 8.735 bar)	
	window laminated safety glass for type – 1	
	acrylic glass (PMMA)	
	polycarbonate (PC)	
	movement stainless steel for type – 1 (for – 3 and – 6 standard)	
	silicone damped brass/polyacetal	
	case ventilation no. 22 for outdoor installation	
	case polished	
	bayonet ring polished	
	leak test of the measuring unit with helium leak detection up to 10^{-9} mbar l/s for types – 3 and – 6	
	wetted parts free of grease and oil adjustment ≤ 250 bar (3,000 psi) with dry air, up to 0 – 600 bar (0 – 10,000 psi) ≥ 400 bar (5,000 psi) with distilled water, dial marking: symbol crossed out oil can	
	oxygen version free of grease and oil as above, additional restrictor screw in the inlet port, orifice $\varnothing 0.3$ mm (0.01"), dial inscription: up to 0 – 600 bar (0 – 10,000 psi) ²⁾ oxygen, no version according to DIN EN 837-1 ³⁾	
	silicone-free version	
	version: dial marking: symbol	
	DNV GL or Russian Sea Register copy of the certificate upon request	
	NCS 100, 160	
	restrictor screw in the pressure inlet orifice $\varnothing 0.8$ mm (0.03")	
	port, material: like process connection orifice $\varnothing 0.6$ mm (0.02") (not for Monel)	
	brass, stainless steel or Monel orifice $\varnothing 0.3$ mm (0.01") (not for Monel)	
	instrument tag stainless steel plate 12 x 55 mm (0.47 x 2.17"), wire mounting sticker on the case coverage	
	flame arrester Adapt FS variant 5 according to data sheet 11001	

Special Versions: Please describe your requirements in cleartext!

¹⁾ for pressure ranges $\leq 10\,000$ psi

²⁾ for instruments without case filling

³⁾ DIN EN 837-1 in connection with oxygen version requires safety category S3

