



WET/WET DIFFERENTIAL PRESSURE TRANSMITTERS

0.5% Accuracy, NEMA 4X (IP66) Enclosure

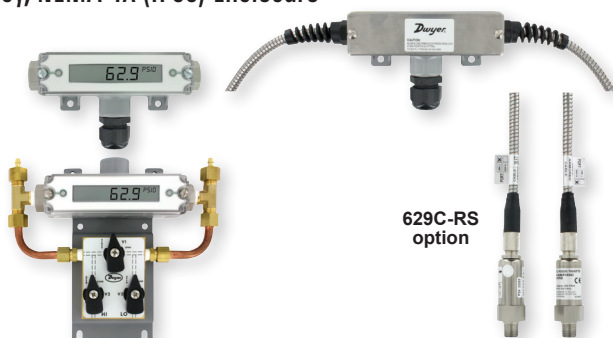

Conduit housing
with remote sensor
available in
10' or 20' shielded
or armored cable

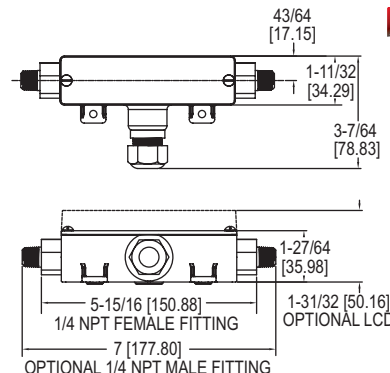

The **Series 629C Wet/Wet Differential Pressure Transmitters** monitor differential pressure of air and compatible gases and liquids with 0.5% accuracy. The design employs dual pressure sensors converting pressure changes into a standard 4-20 mA output signal or field selectable voltage. Small internal volume and minimal moving parts result in exceptional response and reliability. The terminal block, as well as a zero adjustment button, are easily accessed under the top cover. The Series 629C Differential Pressure Transmitter is designed to meet NEMA 4X (IP66) construction.

FEATURES/BENEFITS

- Powered by either DC or AC - take advantage of most readily available power source reducing installation costs
- Optional LCD does not need a separate power supply - lowers installed cost
- Selectable voltage range - provides flexible choice for changing design or inputs for process/HVAC controllers being used to monitor and control
- Push-button zero (versus trim pot) - more simple zeroing provides easy install and calibration reducing installation time and possibility of operator error
- Optional LCD indicator provides local status to identify operational condition
- Remote sensor option reduces installation labor and material

APPLICATIONS

- Flow elements
- Heat exchangers
- Filters
- Coils
- Chiller
- Pumps

SPECIFICATIONS

Service: Compatible gases and liquids.
Wetted Materials: Without valve: 316, 316L SS. Additional wetted parts with valve option: Buna-N, silicone grease, PTFE, brass 360, copper, and reinforced copolymer.
Accuracy: $\pm 0.5\%$ FS (includes linearity, hysteresis & repeatability).
Stability: $\pm 1\%$ FS/year.
Temperature Limits: 0 to 200°F (-18 to 93°C).
Compensated Temperature Limits: 0 to 175°F (-18 to 79°C).
Pressure Limits: See Table 1.
Thermal Effects: Avg 0.04%/°F (0.072%/°C) (includes zero and span).
Power Requirements: 2-wire: 10-35 VDC; 3-wire: 13-35 VDC or isolated 16-33 VAC (reverse polarity protected).
Output Signal: 2-wire: 4-20 mA; 3-wire: Field selectable 0-5, 1-5, 0-10, or 2-10 VDC.

Zero and Units: Push-buttons inside conduit enclosure.
Response Time: 400 msec.
Loop Resistance: Current output: 0 to 1250 Ω (max), $R_{max} = 50(V_{ps}-10)$; Voltage output: Minimum load resistance = 5 k Ω .
Current Consumption: 28 mA (max).
Electrical Connections: Removable terminal block; 1/2" female NPT conduit.
Process Connections: 1/4" female or male NPT.
Display: Optional 4-1/2 digit LCD field attachable display.
Enclosure Rating: Designed to meet NEMA 4X.
Mounting Orientation: Not position sensitive.
Weight: 629C-XX-CH: 10.1 oz (286 g); 629C-XX-R2-P1-E5-XX: 2.3 lbs (1.04 kg); 629C-XX-R6-P1-E5-XX: 4.55 lbs (2.06 kg).
Agency Approvals: CE.

MODEL CHART									
Example	629C	-01	-CH	-P1	-E1	-S1	-3V	629C-01-CH-P1-E1-S1-3V	
Series	629C							Wet/wet differential pressure transmitter	
Range		01						0 to 5 psid	
		02						0 to 10 psid	
		03						0 to 25 psid	
		04						0 to 50 psid	
		05						0 to 100 psid	
		06						0 to 150 psid	
		07						0 to 200 psid	
		08						0 to 300 psid	
		09						0 to 500 psid	
		11						0 to 0.5 bar differential	
		12						0 to 1 bar differential	
		13						0 to 2 bar differential	
		14						0 to 4 bar differential	
		15						0 to 6 bar differential	
		16						0 to 10 bar differential	
		17						0 to 15 bar differential	
		18						0 to 20 bar differential	
		19						0 to 30 bar differential	
Housing			CH					Conduit housing, NEMA 4X (IP66)	
			R1					Conduit housing, NEMA 4X (IP66) with Remote Sensor and 10' shielded cable	
			R2					Conduit housing, NEMA 4X (IP66) with Remote Sensor and 20' shielded cable	
			R5					Conduit housing, NEMA 4X (IP66) with Remote Sensor and 10' armored cable	
			R6					Conduit housing, NEMA 4X (IP66) with Remote Sensor and 20' armored cable	
Process Connection				P1				1/4" male NPT	
				P2				1/4" female NPT	
				P3				1/4" male BSPT	
				P4				1/4" female BSPT	
Electrical Connection					E1			Cable gland with 3' of prewired cable	
					E2			Cable gland with 6' of prewired cable	
					E3			Cable gland with 9' of prewired cable	
					E5			1/2" female NPT conduit	
					E9			M-12 4 pin connector	
Signal Output						S1		4-20 mA	
						S3		Field selectable 0-5, 1-5, 0-10, 2-10 VDC	
Options							3V	3-way valve	
							AT	Aluminum tag	
							FC	Factory calibration certificate	
							LCD	LCD indication	
							NIST	NIST traceable certificate	

Note: -3V option is only available with -P2 process connection.

RANGE			
Range Number	Range	Working Pressure*	Over Pressure
01	0 to 5 psid	10 psi	50 psi
02	0 to 10 psid	20 psi	50 psi
03	0 to 25 psid	50 psi	120 psi
04	0 to 50 psid	100 psi	250 psi
05	0 to 100 psid	200 psi	500 psi
06	0 to 150 psid	300 psi	750 psi
07	0 to 200 psid	400 psi	1000 psi
08	0 to 300 psid	600 psi	1200 psi
09	0 to 500 psid	1000 psi	2000 psi
11	0 to 0.5 bar differential	1 bar	3 bar
12	0 to 1 bar differential	2 bar	8 bar
13	0 to 2 bar differential	4 bar	8 bar
14	0 to 4 bar differential	8 bar	18 bar
15	0 to 6 bar differential	12 bar	18 bar
16	0 to 10 bar differential	20 bar	50 bar
17	0 to 15 bar differential	30 bar	60 bar
18	0 to 20 bar differential	40 bar	80 bar
19	0 to 30 bar differential	60 bar	120 bar

*Pressures exceeding the working pressure limit may cause a calibration shift of up to $\pm 3\%$ of full-scale.

Note: Over pressure of all models with 3-way valve is 100 psi.

ACCESSORIES	
Model	Description
A-155	Cable gland with 1/2" NPT male
A-228	12" SS flex hose
A-62X-LCD	Field-upgradeable LCD
BBV-1B	Mini SS 3-valve block manifold